



**1** Cover walls with approved Weather Resistant Barrier (WRB)


**2** Cut out window opening in WRB as shown

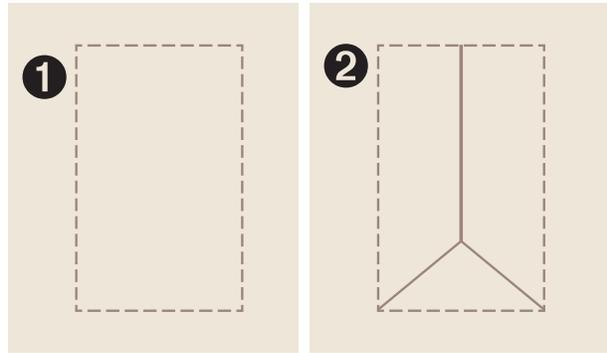


**3** Wrap WRB into window opening as shown to inside face of stud wall. Remove excess wrap that extends beyond inside face of stud wall.

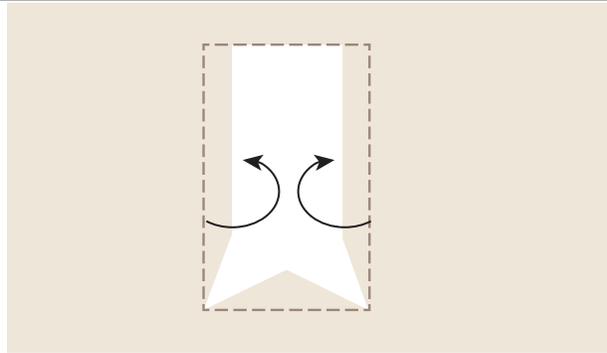

**4** Cut a diagonal line at top corners of window opening to create a flap approximately 6" above the top of window opening.

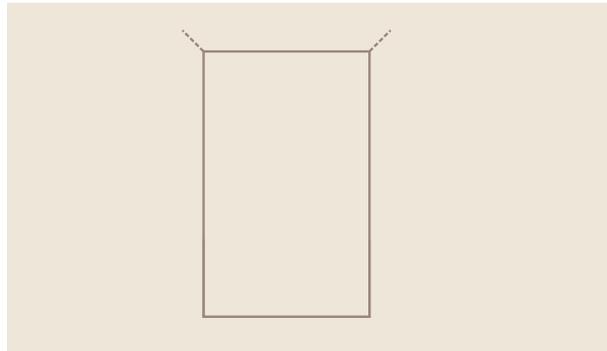

**5** Fold flap up, exposing the sheathing below and tape it up temporarily until flashing can be installed.

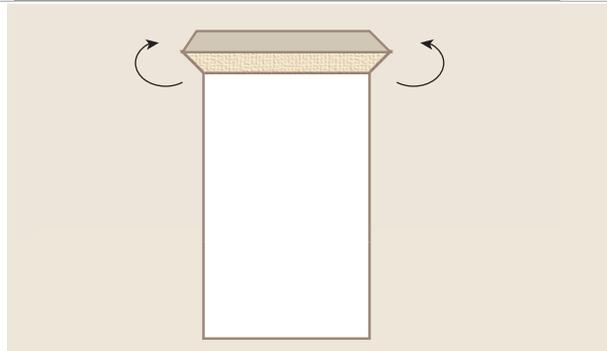

**6** Install flexible flashing tape across the bottom of the opening flexing it to go up each side approximately 6". Part of the flashing tape should extend into the opening. Form a sill dam with the back part of the tape that extends across the sill. If standard flash tape is used, apply the top edge of the flashtape even with the rough opening at the bottom, and extend the ends approximately 6" past the opening on either side.

